G2 Handi-Remote Interface

Handset Remote Extension kit for your MSAT-G2 Mobile Satellite Radio

- **Tired of the distance limitation between your MSAT-G2 handset, radio, and antenna?**
- **Do you want satellite Two-Way Radio and Telephony but don't have the a location for the MSAT-G2 radio's antenna?**
- **You want the reliability of the MSAT-G2 service, so what do you do?**

Link Communications introduces the new G2 Handi-Remote interface kit for the MSAT-G2 Mobile Satellite Radio system. This new interface enables the handset and MSAT-G2 radio to be separated by up to 4000 feet utilizing standard CAT-5/5E network cable. Installation is as easy as plugging both the handset and radio into the Handi-Remote modules and connecting a CAT-5/5E cable run between the two Handi-Remote modules. No configuration or adjustments are necessary to get your MSAT-G2 up and operational. Everything you need to get both ends extended are included with the kit, all you provide is a CAT-5/5E cable run between the two units. Power is provided by the MSAT-G2 on the radio end and +12V power is required on the handset end (power module included).

up to 4000 feet
*** CAT-5 or CAT-5E Cable**

Handset End — **Radio End**

Handi-Remote Modules
Plug and Operate. No adjustments needed.

Link Communications Inc.
+406-245-5002 1-800-610-4085 http://www.link-comm.com

Available for immediate shipping
only $750 for a complete kit

***(CAT-5/5E cable not included)**

Specifications: G2 Handi-Remote (TM) Interface, Handset Extension Kit	
Handset End: Power and Size	
Voltage / Current / Temperature	11V .. 18V DC / 200mA DC @ +12V/DC. 2.5mm Phoenix Power Connector. -4 °F to 158 °F (-20 °C to 70 °C).
Size/Weight	2-1/4" deep x 5-1/2" width x 1" high Weight: 6.3 ounces
Radio End: Power and Size	
Voltage / Current / Temperature	11V .. 18V DC / 200mA DC @ +12V/DC, powered by the radio. -4 °F to 158 °F (-20 °C to 70 °C).
Size/Weight	2-1/4" deep x 5-1/2" width x 1" high Weight: 6.3 ounces
I /O Characteristics	
RJ-45, CAT-5E Jumper Cable	12" Jumper between radio and the Handi-Remote module
RJ-45, CAT-5E Connection Cable	Up to 4000 feet between Radio side Handi-Remote and Handset side Handi-Remote
RJ-45, Handset End	Direct connection between handset and Handi-Remote

CABLE TO HANDSET
HANDSET END
MSAT-G2 END
CABLE FROM RADIO
+12V
G2 Handi-Remote Interface
MSAT-G2 RADIO
Link Communications Inc.
MSAT-G2 HANDSET

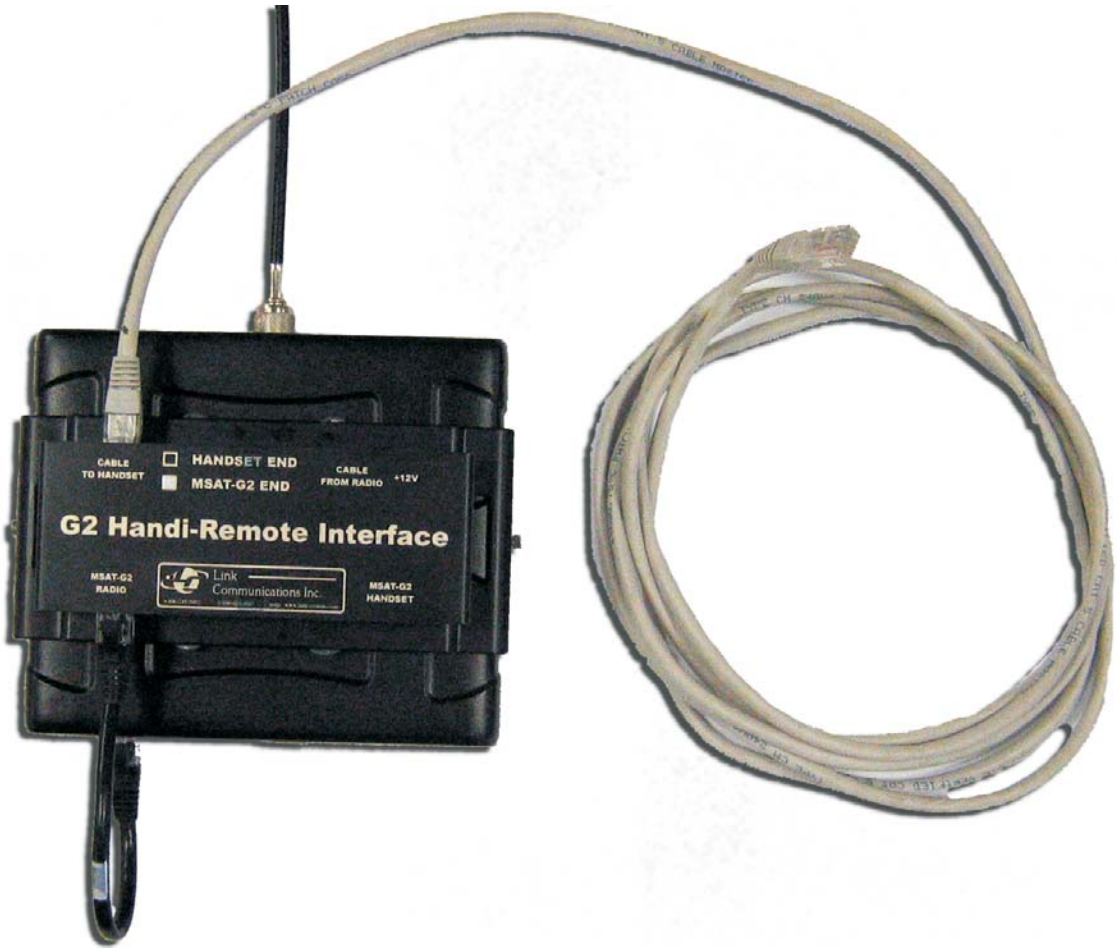
CABLE TO HANDSET
HANDSET END
MSAT-G2 END
CABLE FROM RADIO
+12V
G2 Handi-Remote Interface
MSAT-G2 RADIO
Link Communications Inc.
MSAT-G2 HANDSET